



How to connect oil
barrier with wall
mounting



Quick coupling with double round profile to connect two oil barriers or one oil barrier with a sliding end piece (part of the wall mounting kit #265660, 201976 and 201985). The quick couplings are included in the scope of delivery of the oil barrier.



The coupling is slotted into the attachment profile (which is screwed on the side of the oil barrier) and then secured by means of the locking pin (bolt).

step 1

Insert the end of the oil barrier into the slot of the coupling from above.

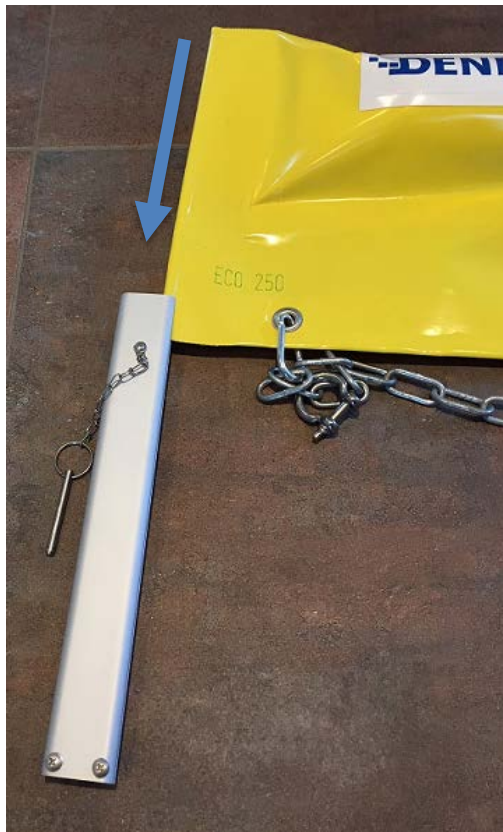

step 2

Insert the sliding end piece of the wall mounting kit into the other slot of the coupling from above.



Illustration similar




Illustration similar

step 3

Secure the coupling by inserting the bolt into the holes provided.



step 4

Insert the other extreme of the sliding end piece (1) into the running rail of the wall mounting kit (2).

